


The storage locker shall conform to the details and be constructed with the following materials:

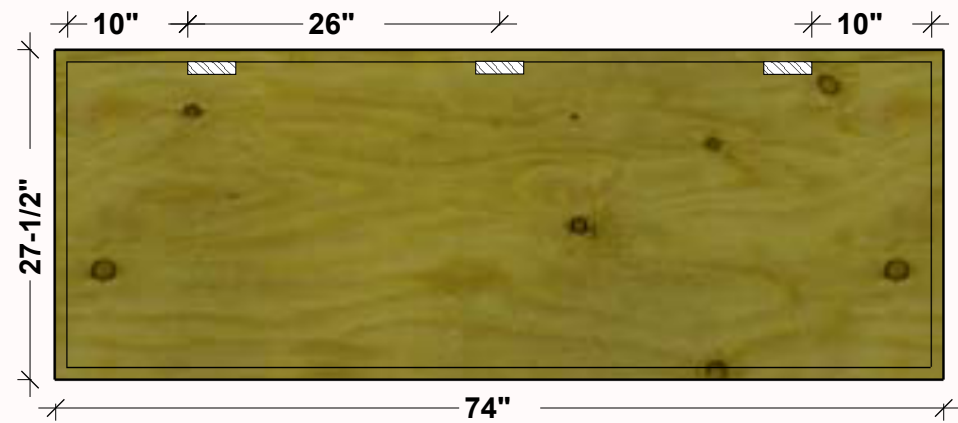

Storage Box



- 72 in. (W) x 25-1/2 in. (D)
- Front Side – 36 in. (H)
- Back Side – 37 in. (H)
- 3/4 in. ACX or BCX Plywood, Exterior Grade, Finish side facing exterior
- Top of storage box shall be sloped towards the front to allow water / liquids to runoff and prevent standing water on storage box.

Storage Box Lid

- 3/4 in. ACX or BCX Plywood, Exterior Grade, Finish side facing exterior
- Storage lid shall extend one-inch (1") past storage box on all sides

Storage Box Stand/Legs

- 2 in. x 4 in. Pressure Treated Studs (Qty. = 3)

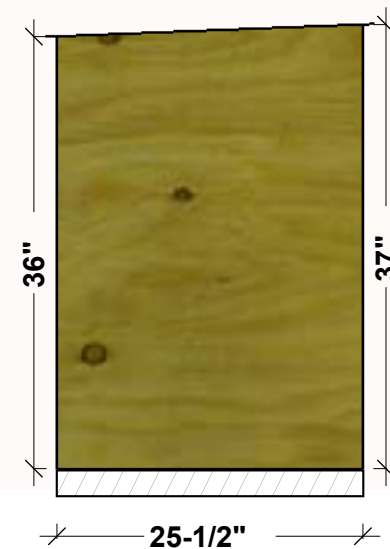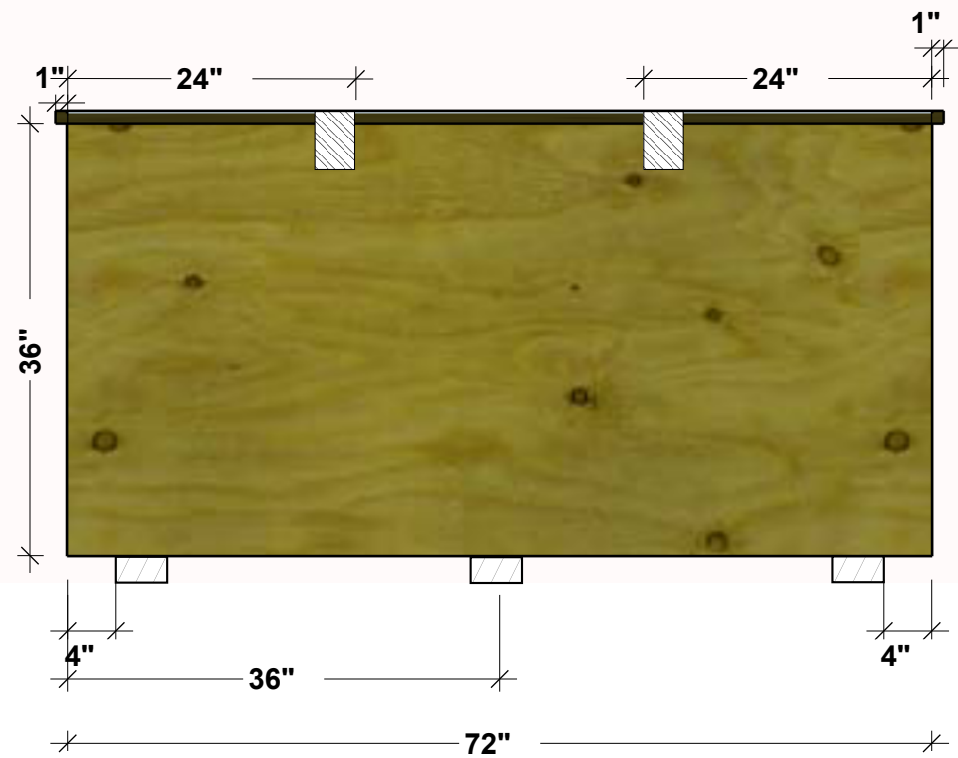

Paint

Exterior

- BEHR Premium Plus Ultra - #PPU 18-18, Mined Coal, Flat Exterior Paint
- Minimum two (2) finish coats
- Paint all exposed/visible plywood/wood surfaces of the unit

Interior

- No requirements

Screws/Fasteners/Nails

- Galvanized or stainless steel to prevent rusting
- Tamper-proof / security screws/bolts (if installation will be surface mounted or exposed)

Hinges

- 4 in. stainless steel tee hinges (Qty. = 3)
- Non-removable pins
- Hinges should be installed so that fasteners / screws are not exposed; otherwise, recommend using bolts or tamper-proof / security screws to install hinges.

Latch/Lock

- Zinc Plated Hasp Lock (with Keyed or Pad Lock) (Qty = 2)

THE PAVILION AT WAIKIKI
1925 Kalakaua Avenue
Honolulu, HI 96815

PROJECT
Parking Stall Storage Unit
Option B - Exterior Stalls

DRAWN BY
NN

ISSUE
11.16.2015

RE-ISSUE
12.16.2015

DESCRIPTION
Parking Stall Storage Unit
Details & Material List