




**TOP VIEW**

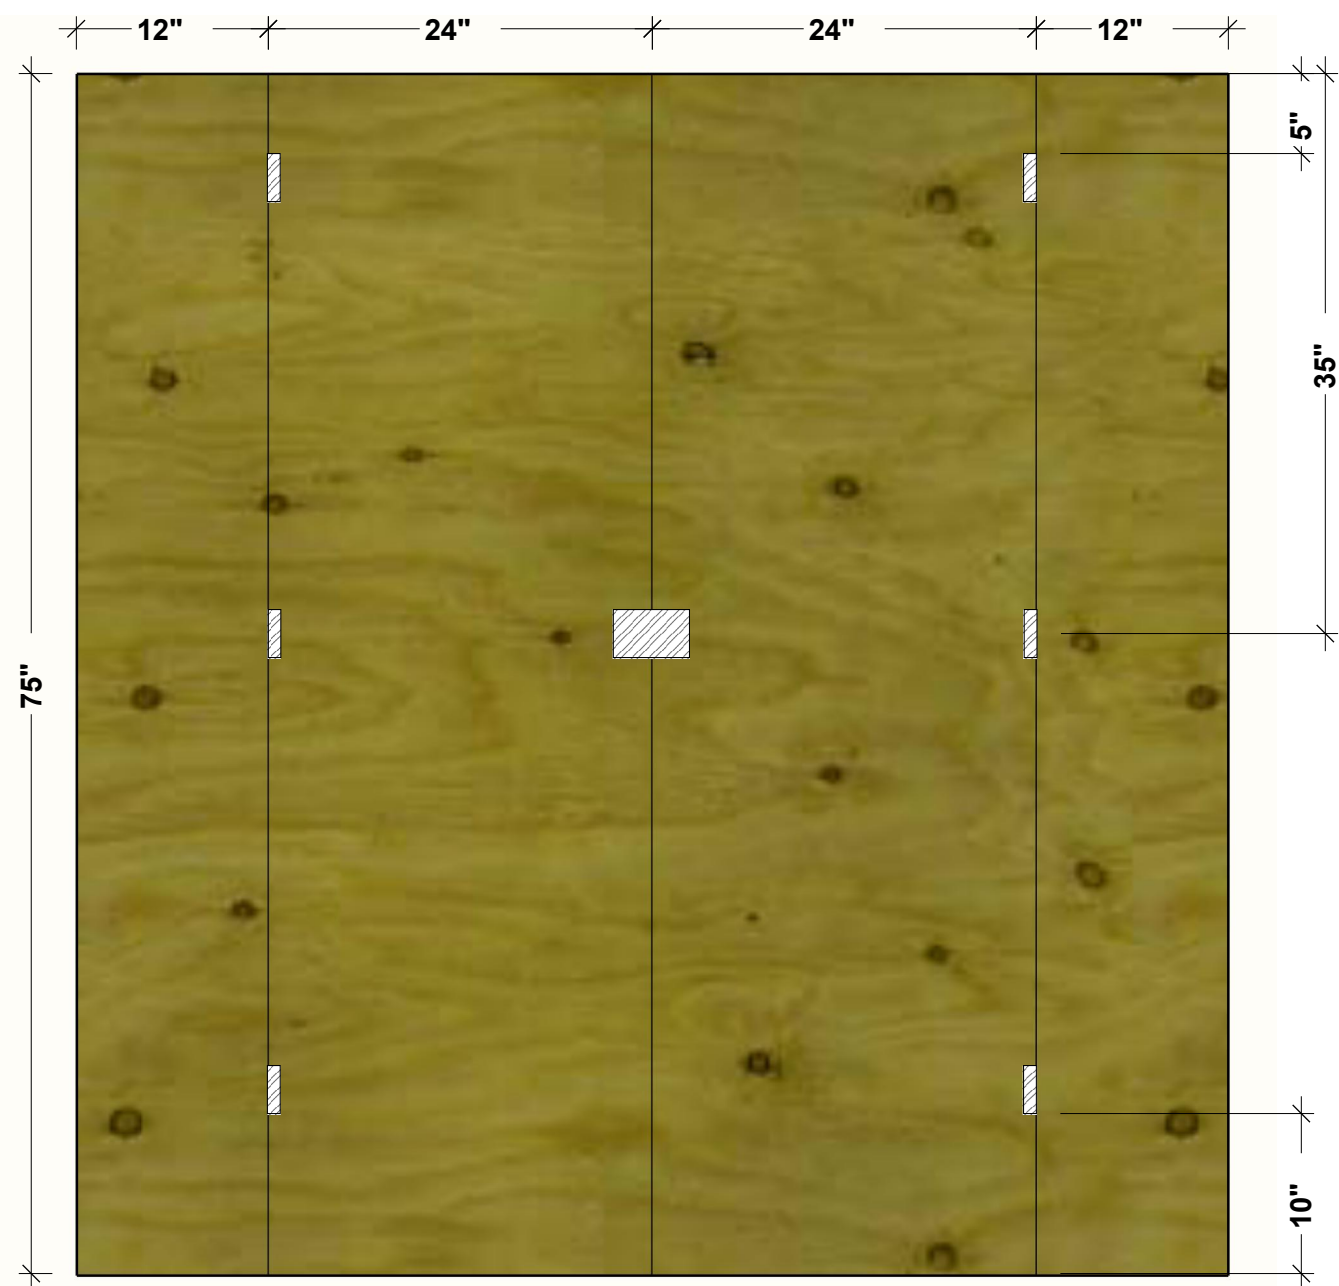

**FRONT VIEW**

The storage locker shall conform to the details and be constructed with the following materials:

**Storage Locker**

- 75 in. (H) x 72 in. (W) x 25-1/2 in. (D)
- 3/4 in. ACX or BCX Plywood, Exterior Grade, Finish side facing exterior

**Storage Doors**

- 3/4 in. ACX or BCX Plywood, Exterior Grade, Finish side facing exterior
- Bi-Fold Doors
- 75 in (H) x 24 in. (W)

**Paint**

*Exterior*

- BEHR Premium Plus Ultra - #PPU 18-18, Mined Coal, Flat Exterior Paint
- Minimum Two (2) Coats
- Paint all exposed/visible plywood surfaces of the unit

*Interior*

- No Requirements

**Screws/Fasteners/Nails**

- Galvanized or Stainless Steel
- Tamper-proof / security screws/bolts (if installation will be surface mounted or exposed)

**Hinges**

- 3 in. x 3 in. Hinges
- Non-Removable Pins
- Three (3) hinges for each storage door
- Hinges should be installed so that fasteners / screws are not exposed; otherwise, recommend using bolts or tamper-proof / security screws to install hinges.

**Latch/Lock**

- Zinc Plated Hasp Lock (with Keyed or Pad Lock)

**Interior Shelving**

- No Requirements

**THE PAVILION AT WAIKIKI**  
1925 Kalakaua Avenue  
Honolulu, HI 96815

**PROJECT**  
Parking Stall Storage Unit  
Option A - Interior Stalls

**DRAWN BY**  
NN

**ISSUE**  
11.16.2015

**RE-ISSUE**  
12.16.2015

**DESCRIPTION**  
Parking Stall Storage Unit  
Details & Material List

**A**0.1